
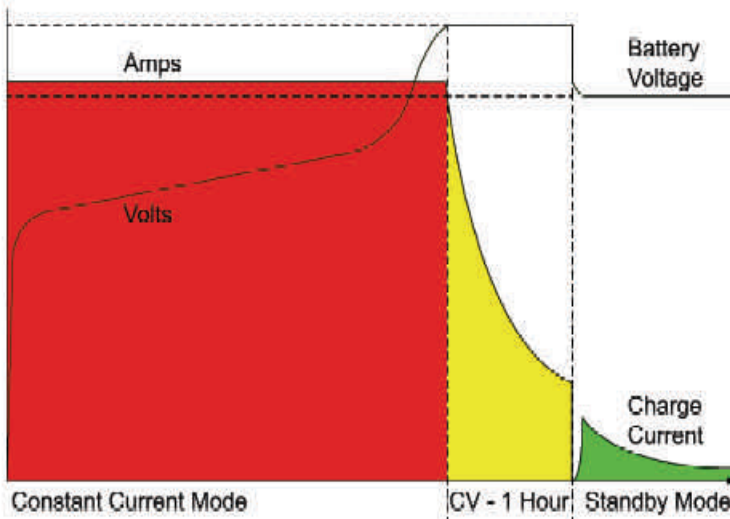


# PRO-LITE

## ALPHA62.0 PLUG TOP CHARGER

### Features:-

- Switch mode
- Input voltage 220/240v 50Hz
- Output voltage 6v
- Output current 2A
- 3 stage charging
  - Constant current
  - Constant voltage
  - Float
- Timing control
- 3 LED status indication
- Reverse polarity protection
- Compact plastic housing
- Short circuit protection
- Light weight
- Cost effective

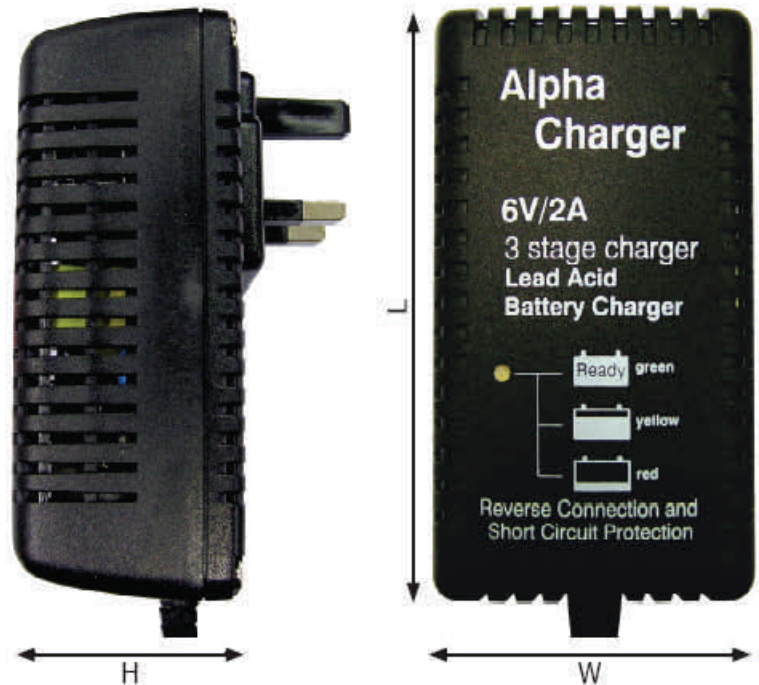

### Options:-

- Input voltage 110/130v
- Output connector options
- Set for sealed lead acid
- European plug format

### Applications:-

- Torches
- Toys
- Medical equipment
- Tools

Model	Input Voltage	Output (Volt/Amps)	Dimensions (L x W x H mm)	Weight (Kg)	Minimum Battery Size
Alpha62.0	220/240v 50Hz	6v 2A	105 x 65 x 42	0.27	8Ah



Chargers are CE marked to indicate compliance with the Electromagnetic Compatibility Directive (89/336/EEC) and amending directive (92/31/EEC).

