





### PS-1212 12V 1.2AH

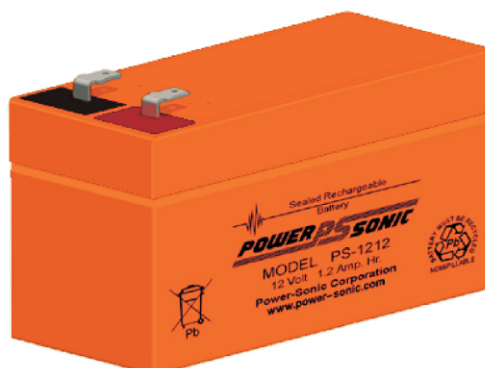


Flame retardant V-O Case & Cover


#### Discharging Current & Discharge Duration Time

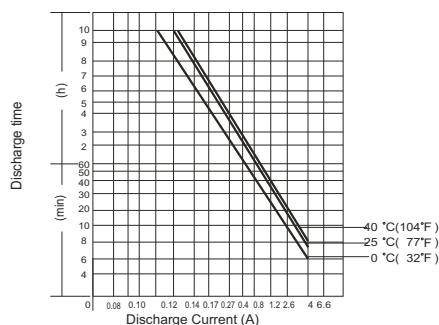


#### Discharge Characteristics (25°C, 77°C)

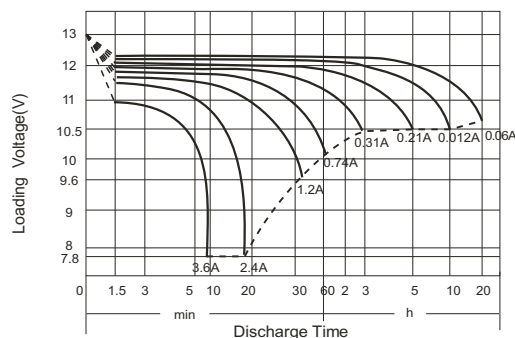

#### Dimensions (mm)

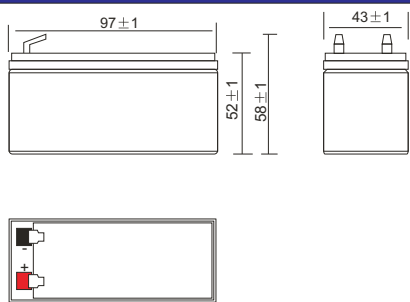

#### Standard Terminal (mm)

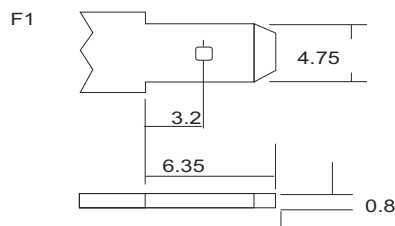

#### Physical Specification

Nominal Voltage	12V	
Nominal Capacity (20HR)	1.2AH	
Dimension	Length	97 ± 1mm
	Width	43 ± 1mm
	Container Height	52 ± 1mm
	Total Height (with Terminal)	58 ± 1mm
Weight	Approx 0.6kg	
Standard Terminal	F1	

#### Electrical Specification

Rated Capacity	20 hour rate (60mA)	1.20AH	Constant-Voltage	Cycle	Initial Charging Current less than 0.36A. Voltage 14.4V~ 15.0V at 25°C (77°F) Temp. Coefficient -30mV/°C
	10 hour rate (116mA)	1.16AH			
	5 hour rate (206mA)	1.03AH			
	1 hour rate (740mA)	0.74AH			
Capacity affected by Temperature	40°C (104°F)	103%	Charge	Standby	No limit on Initial Charging Current Voltage 13.5V~13.8V at 25°C(77°F) Temp. Coefficient -20mV/°C
	25°C (77°F)	100%			
	0°C (32°F)	86%			

#### Constant Power Discharge Characteristics Unit: Amperes (25°C, 77°F)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	4.63	3.15	2.33	1.38	0.78	0.45	0.338	0.271	0.222	0.145	0.121	0.063
1.67V	3.99	2.81	2.11	1.28	0.74	0.43	0.322	0.258	0.211	0.143	0.118	0.062
1.70V	3.81	2.69	2.05	1.24	0.73	0.42	0.315	0.254	0.209	0.142	0.117	0.062
1.75V	3.46	2.46	1.92	1.19	0.71	0.40	0.306	0.248	0.206	0.140	0.116	0.061
1.80V	3.07	2.24	1.76	1.15	0.68	0.39	0.300	0.242	0.199	0.137	0.115	0.060
1.85V	2.29	1.75	1.45	0.97	0.60	0.36	0.279	0.227	0.185	0.130	0.108	0.059

#### Constant Current Discharge Characteristics Unit: Watts (25°C, 77°F)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	46.1	32.1	24.5	15.1	8.81	5.08	3.87	3.13	2.57	1.70	1.42	0.743
1.67V	41.0	29.5	22.6	14.2	8.47	4.89	3.71	2.99	2.46	1.68	1.40	0.737
1.70V	39.3	28.3	22.0	13.8	8.33	4.83	3.64	2.95	2.44	1.67	1.38	0.731
1.75V	36.7	26.6	20.9	13.3	8.10	4.66	3.54	2.88	2.41	1.65	1.37	0.718
1.80V	33.3	24.6	19.4	12.9	7.78	4.51	3.49	2.83	2.33	1.62	1.36	0.712
1.85V	25.1	19.4	16.3	11.1	7.01	4.16	3.26	2.66	2.18	1.53	1.29	0.706



Power-Sonic Europe Limited  
 3 Buckingham Square, Wickford, Essex, SS11 8YQ  
 Tel: +44 (0)1268 560686 Fax: +44 (0)1268 560902  
 sales@power-sonic.co.uk  
 www.power-sonic.co.uk